



# SHOCKER HD PINTLE RING INSTALLATION GUIDE

## **INSTALLING ONTO SHOCKER TONGUE MOUNT AIR HITCH**

- Take the pintle ring line it up with the mounting holes of the Shocker Hitch Tongue Mount Air Hitch (see Figure 1).
- Insert the two bolts through the Shocker Hitch and pintle ring and hand thread the locking nuts onto the bolts (see Figure 2 & Figure 3).
- Tighten nuts using wrench and/or impact and torque each bolt to 100 ft. lbs.

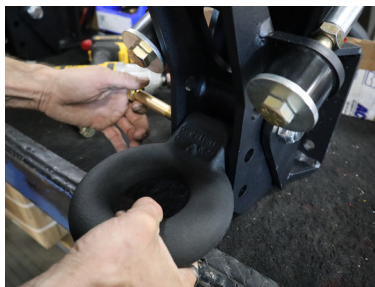


Figure 1: Line Up Pintle Ring with Shocker Hitch



Figure 2: Insert Two Bolts Through Shocker Hitch & Pintle Ring



Figure 3: Tighten Bolts & Torque to 100 Ft. Lbs.

## **INSTALLING ONTO TRAILER TONGUE WITH ADJUSTABLE CHANNEL**

- Take the pintle ring line it up with the mounting holes of the tongue channel.
- Insert the two bolts through the tongue channel and pintle ring and hand thread the locking nuts onto the bolts.
- Tighten nuts using wrench and/or impact and torque each bolt to 100 ft. lbs.

THANK YOU FOR CHOOSING SHOCKER HITCH

Shocker Hitch: Safer Smoother Towing - 2801 3RD AVE SW, JAMESTOWN ND, 58401 - (701)-707-2666

•Email: [orders@shockerhitch.com](mailto:orders@shockerhitch.com) •Website: [www.shockerhitch.com](http://www.shockerhitch.com) •Installation Videos on [Shocker Hitch](#) YouTube Channel